


MURATEC Fax

F-300

Beyond the BASICS

The F-300 delivers exceptional functionality and performance for any office environment.

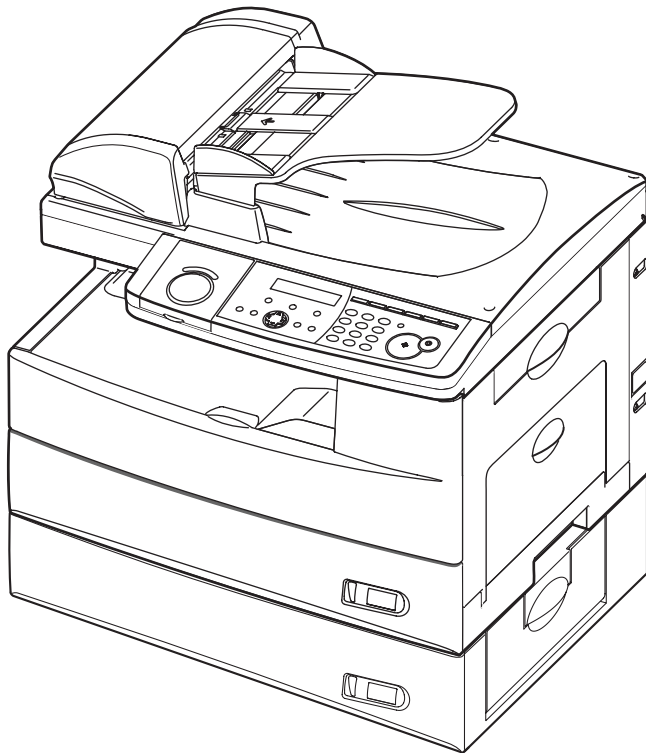

Key Specifications:

- ✧ 13 pages-per-minute
- ✧ 33.6 Kbps fax modem
- ✧ 200 location auto dialing
- ✧ Broadcasting, polling and group dialing
- ✧ Standard PC printing
- ✧ 80-sheet automatic document feeder
- ✧ Flexible paper capacity
- ✧ Standard color scanning

Features & Benefits

13 ppm print engine

- ✧ Output printing at speeds up to 13 pages-per-minute

33.6 Kbps modem with JBIG compression

- ✧ High-speed modem transfers data at speeds up to 2 seconds per page

80-sheet automatic document feeder

- ✧ Fax, copy or scan large jobs without having to split them into multiple sets

200 location address book

- ✧ Store frequently dialed fax numbers for instant recall

Memory transmission

- ✧ Scanned documents are held in memory when line is busy

Broadcasting and group dialing

- ✧ Send documents to multiple parties at the touch of a button

Expandable memory

- ✧ Upgrade from the standard 8-MB memory to 40-MB, creating sufficient memory storage for large applications

Energy Star compliant

- ✧ Energy Save Mode reduces energy consumption to minimum operating levels, prolonging machine life and lowering electricity bills

Flexible paper capacity

- ✧ Standard 500-sheet paper capacity easily expands to 1,000 sheets with optional 2nd cassette and allows for simultaneous use of letter and legal sized paper

Multipurpose bypass tray

- ✧ Print unique media such as letterhead, envelopes, labels or overhead projector sheets from the 50-sheet bypass tray

Standard PC printing

- ✧ Windows-based GDI printing system produces crisp printouts at 600 dpi

Standard color scanning

- ✧ Scan color hardcopy photos, charts and various office documents
- ✧ TWAIN compliance for direct scanning of images into popular software applications

Optional Internet fax

- ✧ Send hardcopy documents to remote Internet fax terminals or e-mail inboxes

Optional network connectivity

- ✧ Optional 10/100 BaseT Ethernet interface supports PCL 6 printing

EasyChangeSM consumables

- ✧ Front loading consumables can be quickly changed without the need for a service call

Intuitive control panel

- ✧ Two-line LCD provides clear instruction and operational guidance
- ✧ "Macro" keys allow for one-touch initiation of complex fax/copy commands

SPECIFICATIONS – F-300

GENERAL		OS Support		Automatic Redial	
Classification	Mid Volume PPF	Win 98SE/Me/NT4.0/2000/XP/Server 2003		Confirmation Report	2-15 attempts
Recording Method	LED	Alignment	Left corner	Selectable TTI	Yes
Print Speed	13 ppm	FAX		Max. Scan Width	3
Macro Program Keys	7	Modem Speed	33.6 Kbps		8.2"
Document Feeder	80 sheets	Max. Compression	JBIG	COPY	
Standard Paper Capacity	550 sheets	Max. Tx Speed	2 spp	Number of Copies	1-99
Max. Paper Capacity	1,050 sheets	Default Scan Speed	1.8 spp	Warm-Up Time	23 seconds
Cassette Paper Weight	20-24 lb.	Std. Document Mem.	8 MB	FCOT	12 seconds
Jam Access	Side cover	Max. Document Mem.	40 MB	Reduction/Enlargement	25-100%
Display	2-line LCD	Document Mem. Back-up	72 hours	Max. Resolution	600 x 600 dpi
Department Codes	100	One-Touch Locations	40	Grayscale	256 levels
Dimensions (H x W x D)	17.5" x 20.4" x 17.7"	Speed Dial Locations	160	Default Scan Speed	2.7 spp
Weight	41.8 lbs.	Broadcasting	230 locations	Combine	2:1
Toner Yield	7,500 @ 4%	Group Dialing	32 groups	Max. Scanning Width	8.5"
Drum Yield	20,000	Cover Page Insertion	Yes	Copy Reservation	Yes
PRINT		Out-of-Paper Reception	250 jobs	Electronic Sorting	Yes
Resolution	600 dpi	Block Junk Fax	50 locations	SCAN	
Type	Standard GDI, Optional PCL 6	Security Reception	Yes	Resolution	600 x 600 dpi
Interface	Standard USB 2.0	Fax Forwarding	Yes	Grayscale	256 levels
Ethernet	10/100BaseT, RJ-45 connection	Batch Transmission	5 locations	Interface	USB 2.0
Network Protocol	TCP/IP	F-Code Compliant	20 boxes	TWAIN Compliant	Yes
		Dual Line	Optional	Scan Boxes	20
		Error Correction Mode	Yes	Default Color Scan Speed	13.15 spp
				Default Monochrome Scan Speed	4.1 spp



As an ENERGY STAR® partner, Muratec America, Inc. has determined that these products meet the ENERGY STAR® guidelines for energy efficiency. Muratec, the Muratec logo and all Muratec product and feature names are trademarks of Muratec America, Inc. Energy Star is a registered trademark of the U.S. Environmental Protection Agency.

All specifications subject to change.



Muratec America, Inc.
3301 East Plano Parkway, Suite 100, Plano, Texas 75074
For more information on Muratec products or services, call (469) 429-3300 or visit our web site at www.muratec.com